



JANSEN STEEL DOOR

Features:

- All Doors to be manufactured from 2mm thick mild steel Jansen sections, all joints to be welded and ground to smooth finish. Jansen sections to be shot blasted, hot zinc sprayed and polyester powder coated textured finish, to any BS or RAL No (All Metallic and certain silver paints at extra cost).
- Complies with Part M regulations for wheelchair access
- Custom designs on request

Specification:

Sizes:

- Any size made to order

Ironmongery:

- 12mm Anti-nip stainless steel continuous hinge
- Stainless steel pull handle 225x22mm
- Stainless steel push plate internal face

Alternative Frames:

- 80x40x2mm stainless steel hollow section
- 100x50x2mm stainless steel hollow section

Alternative Glazing:

- Pyroshield georgian wire glass
- Laminated glass
- Obscure glass
- Double glazed sealed unit

Hardware:

- LCN2035 concealed door closer
- Stainless steel kick plate internal and external

Options:

- Magnalock housing to be manufactured from 60x40x2mm (for M32 magnets) or 100x50x2mm (for M62 magnets) stainless steel hollow section fixed with security screws

- 2-No Magna Locks (Securiton M32 and M32C)

OR

If Secured By Design is Required (Tested and Certified)
2-No Magna Locks (Securiton M62 and M62C)


- RX100 low level threshold
- Fanlights and sidelights

Finishes :


- Painted - BS or RAL colour

Please Note


All/any electrical equipment to be disconnected and connected by others. Electrical equipment supply and connected by others.

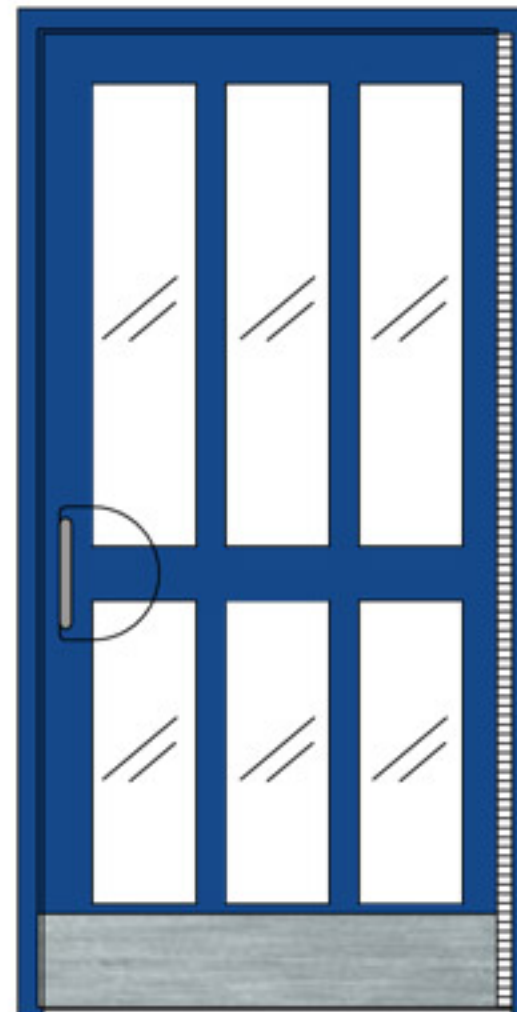


MIL-121

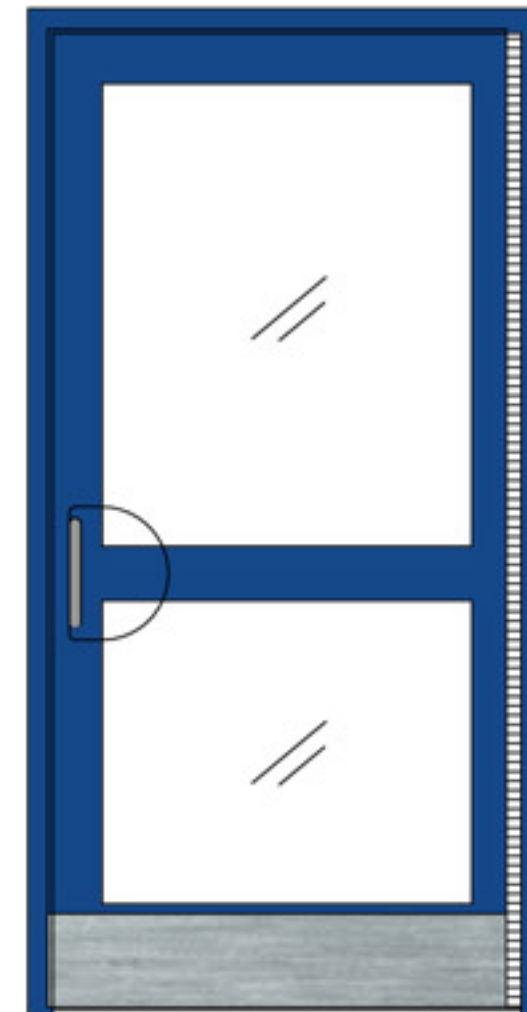


MIL-122

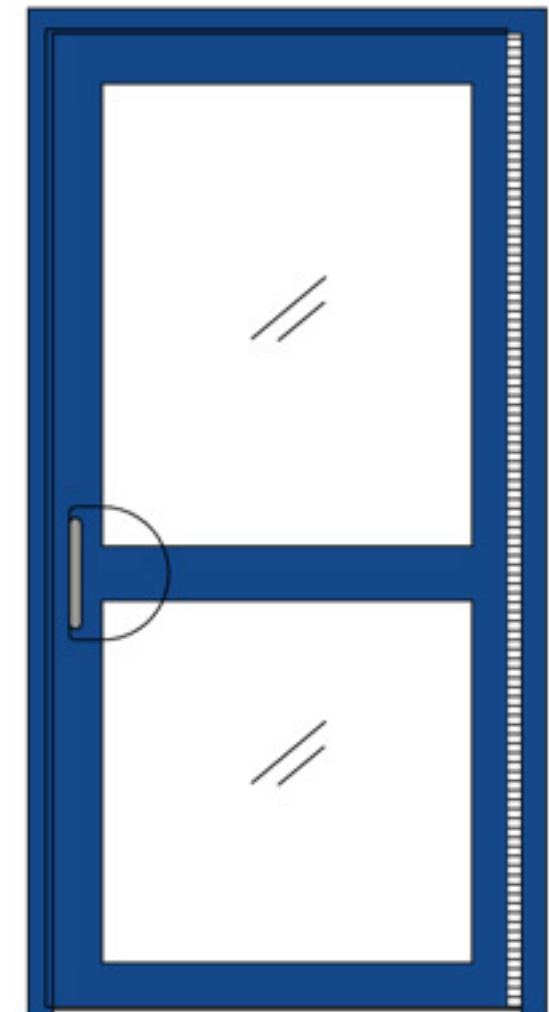


MIL-123

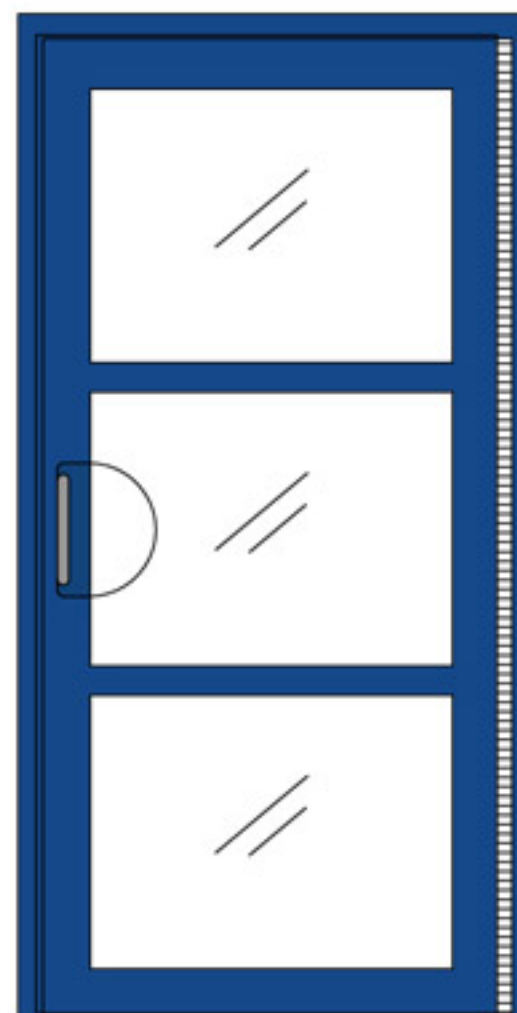


MIL-124

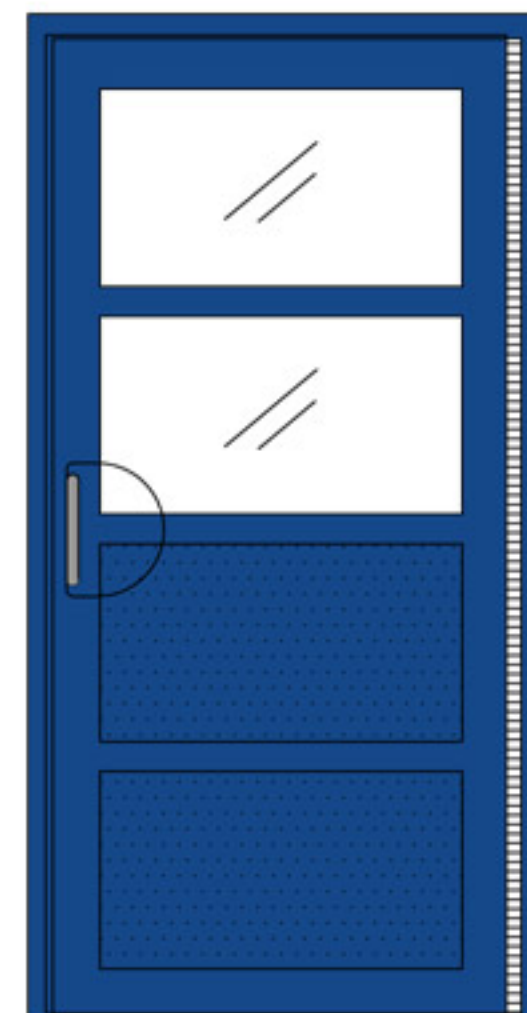

MIL-125

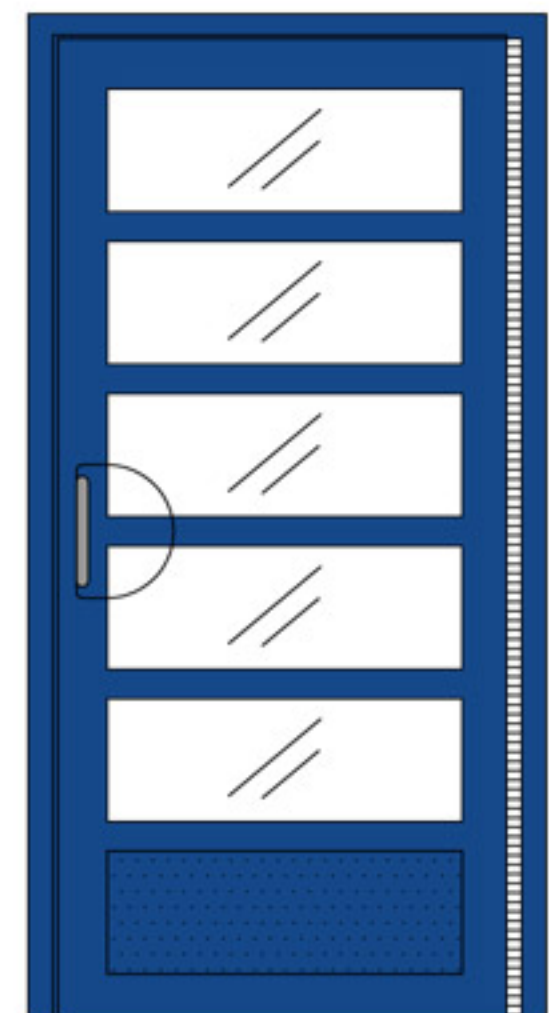

MIL-126

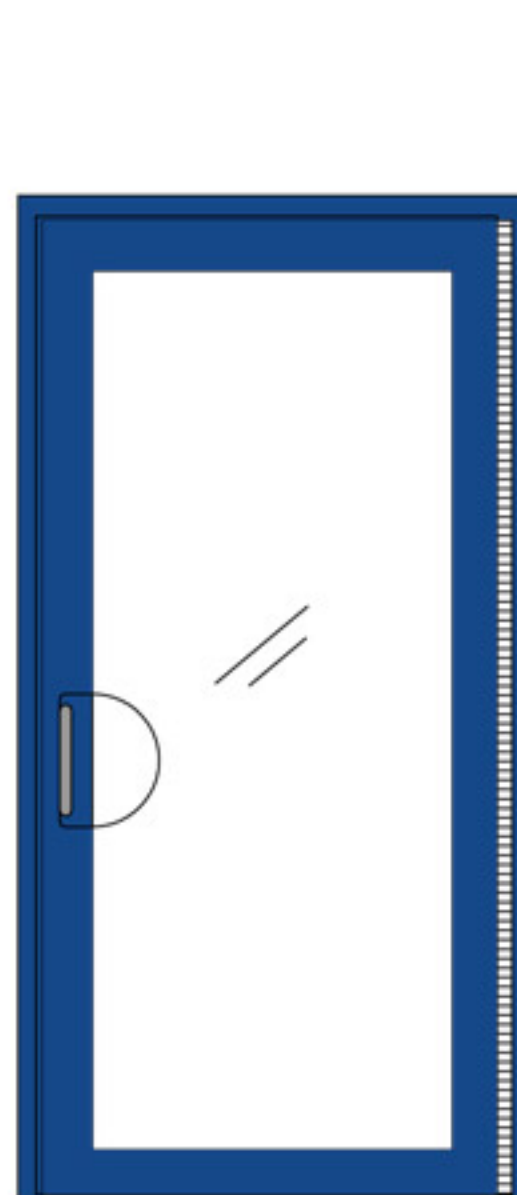

MIL-127



MIL-128

